

SI-6737

Addressable Sounder Beacon



OVERVIEW

SI-6737 Addressable Sounder Beacon will make loud alarm sound and optical indication at the same time when fire was detected by fire detection and fire alarm system. The sounder beacon can be clearly heard and visible observed as a danger signal. With the pleasing appearance, it is also easy to install and maintain.




FEATURES

- ▶ 16 Tone available
- ▶ Sounder / Optical indication switchable
- ▶ Type A: Indoor use
- ▶ High Luminance, low-powered LED visual alarm display
- ▶ 4 sounder output level
- ▶ Addressable Sounder Beacon
- ▶ Designed to comply with EN54-3



Alert Base

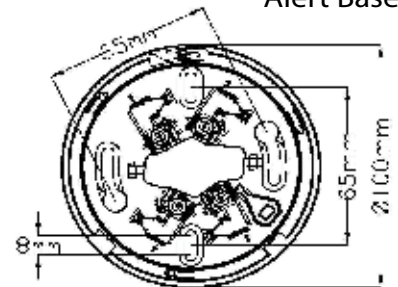

TECHNICAL DATA

Operating Voltage	: 16-28V (Modulated - pulse)
Standby Current	: ≤0.3mA
Alarm Current	: <8 mA
Wiring	: Two-wire (non-polarized)
Temperature range	: -10°C~50°C
Humidity	: ≤95%RH, (40±2°C) No condensation
Visual Alarm Indication	: 0.2s light on; 0.8 lights off
IP Rating	: 21C