




GA-8128 / GA-8129
SPRINKLER HEAD RECESSED HORIZONTAL SIDEWALL
HORIZONTAL SIDEWALL
LIGHT HAZARD (EXTENDED COVERAGE)

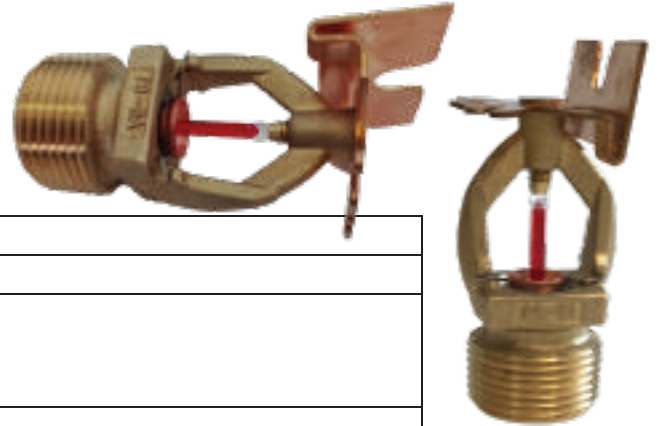


Technical Specification:

Nominal "K" Factor	8,0 (115 metric)
Thread Size	3/4" NPT (R3/4)
Temperatures	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C)
Maximum Working Pressure	175 psi (12 bar)
Materials	Frame: Brass Alloy Deflector: Cooper Alloy Screw: Brass Alloy Bulb Seat: Copper Alloy Sealing Spring: Nickel Alloy Lodgment Spring: Stainless Steel Bulb: Glass, 3 mm or 5 mm size
Reference	GA8128 GA8129 GA8174
Finish¹	Bronze Chrome Polyester

1. Other Finishes available under request.

Dimensions:

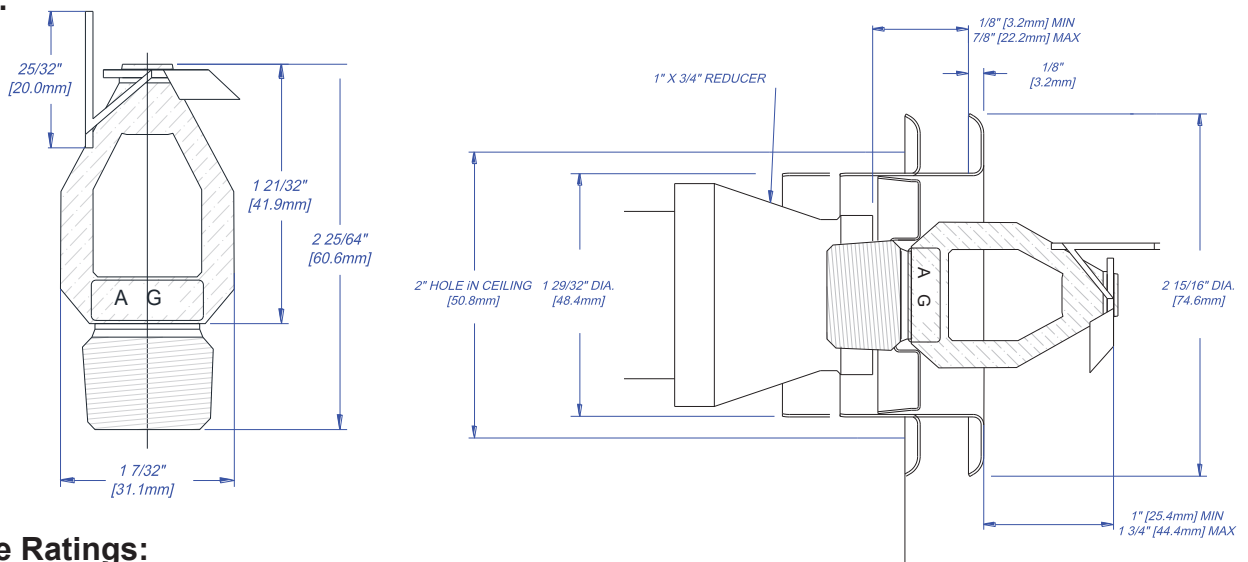

Temperature Ratings:

Classification	Sprinkler Temperature		Max. Ambient Temperature		Bulb Color
	°F	°C	°F	°C	
Ordinary	135	57	100	38	Orange
Ordinary	155	68	100	38	Red
Intermediate	175	79	150	66	Yellow
Intermediate	200	93	150	66	Green