




KX06-044B4-00 PRESSURE REGULATING VALVE (PRV)

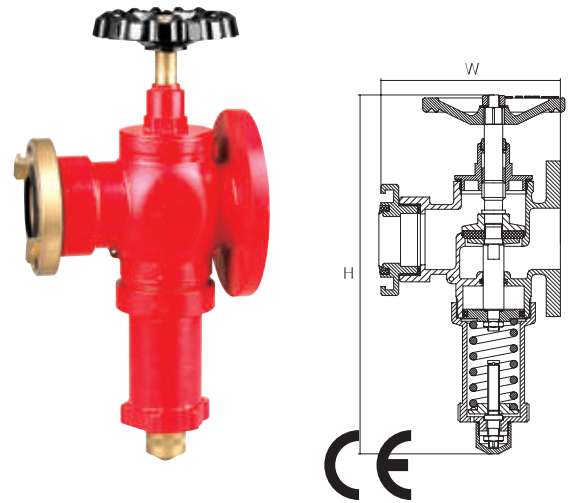

Technical specification of HP Landing Valves

- * BODY: Copper Alloy; Thickness $\geq 4\text{mm}$
- * HANDWHEEL: Grey cast iron or Aluminium alloy
- * BLANK CAP: Copper Alloy or Plastic
- * INLET: Flanged or BSP screwed
- * OUTLET: Female Instantaneous to BS 336
- * SURFACE: Red or Yellow Painting
- * TEST PRESSURE: 30 BAR
- * FULLY OPEN: 4.5 TURNS
- * INLET PRESSURE 20 BAR, REGULATING OUTLET STATIC PRESSURE 5~8 BAR
- * INLET PRESSURE 30 BAR, REGULATING OUTLET STATIC PRESSURE > 20 BAR

Size	H(mm)	W(mm)	Inlet	Outlet
DN50	385	220	165	2.5"Storz
DN65	385	220	185	2.5"Storz