





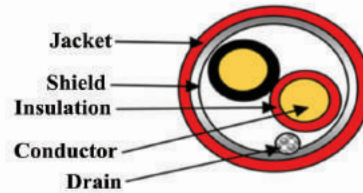


SECURE
FIRE ALARM CABLE

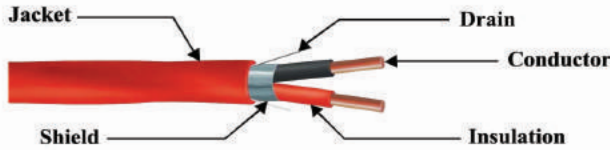

Structure	Material	1.0mm ²
Center conductor,dia,mm	Bare copper	1.12mm
Conductor NO.	-	2-24 cores
Dielectric,dia,mm	FPLR PVC	1.82mm
Shield	AL tape + PET	YES
Drain wire,dia,mm	Tinned bare copper	0.8mm
Jacket,dia,mm	FPLR PVC	5.8mm
Jacket color	Red/White	-



Structure	Material	1.5mm ²
Center conductor,dia,mm	Bare copper	1.37mm
Conductor NO.	-	2-24 cores
Dielectric,dia,mm	FPLR PVC	2.37mm
Shield	AL tape + PET	YES
Drain wire,dia,mm	Tinned bare copper	0.8mm
Jacket,dia,mm	FPLR PVC	6.65mm
Jacket color	Red/White	-



Structure	Material	2.5mm ²
Center conductor,dia,mm	Bare copper	1.76mm
Conductor NO.	-	2-24 cores
Dielectric,dia,mm	FPLR PVC	3.16mm
Shield	AL tape + PET	YES
Drain wire,dia,mm	Tinned bare copper	0.8mm
Jacket,dia,mm	FPLR PVC	7.8mm
Jacket color	Red/White	-

Insulation Resistance 200 M.Ω KM
 Operating Voltage 300V/500V
 Test Voltage 2.5KV
 Temperature range -20°C - 75°C