

## FXL 180A-LED EMERGENCY LIGHT




### Standard Housing Features:

- \* 6 Volt Thermoplastic battery
- \* Unit damp location listed is standard on all models sealed
- \* Maintenance free lead calcium battery
- \* UL listed
- \* Working duration at 180 minutes



### Electrical Features:

- \* Dual Voltage input: 120/277 VAC, 50/60Hz
- \* Line - latching
- \* Brownout circuit
- \* Low voltage disconnection
- \* Overload / short circuit protection
- \* Test switch / power connector facilitates installation

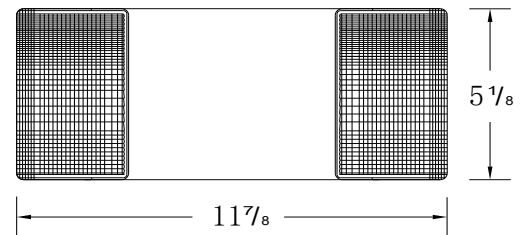

### Housing Construction:

- \* All components are injection molded, color stable, high impact thermoplastic material
- \* Designer textured finish standard
- \* Components are of snap-fit construction to facilities under 5 minute installation
- \* Reinforcing ribs throughout to provide maximum strength
- \* Suitable for wall or ceiling mount applications
- \* Universal J-box mounting pattern
- \* Keyhole mounting slots

### Battery:

- \* Sealed Lead calcium, recombination maintenance - free, long life
- \* Full recharge time: 24 hrs (Max)
- \* Polarized battery terminals