

## EMDS2 EMERGENCY LIGHT (ROUND)




### Technical Specification:



* Input Voltage	:	220 ~ 240 VAC 50/60Hz
* Power consumption	:	Max. 5.5W
* Charge time	:	24 Hrs
* Discharge duration	:	3 Hours
* Operation	:	ACEM, Maintained and Non-maintained operation
* Source	:	SMD 2835, 3W CCT 6500K
* Luminous Flux	:	180lm, constant on emergency duration
* Beam angle	:	120°
* Battery	:	Ni-MH battery, AA type
	:	3.6V3.0Ah (3 Hrs)
* Test facility	:	AUTO test and DALI interface
* Mounting	:	Ceiling recessed mounting, Ceiling thickness 25mm max.
* Degree of Protection	:	IP20
* Insulation CLass	:	Class II
* Ambient temperature	:	0°C... +40°C
* Round cover	:	Dia 55mm or 80 mm optional
* Cut out	:	Dia 42-50mm or 66-70 mm
* Material	:	All material RoHS compliance

### Product Dimension:

Dia.55mm round cover:

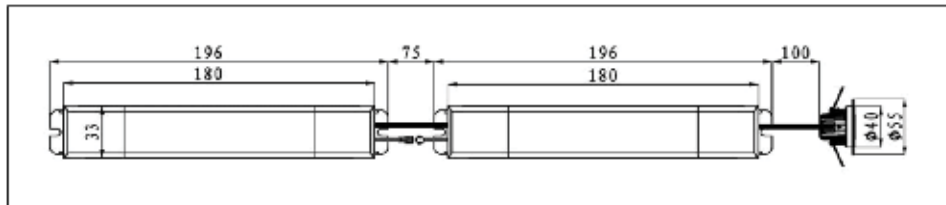

Dia.80mm round cover:

