


## ESA - 10 EXIT EMERGENCY LIGHT



### Standard Features:

- \* Compact and decorative design
- \* LED self contained luminaire with manual test and AUTO test optional
- \* Ni-Cad and Ni-MH battery optional
- \* Single and double face universal
- \* Replaceable pictogram design including **arrow right, left and down**
- \* High Luminance model optional
- \* Low operation cost via low power consumption
- \* Maintained and non-maintained operation changeable
- \* Material of luminaire compliant with the glow wire test at temperature of 850°C
- \* RoHS compliance

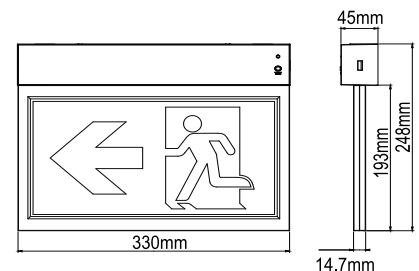

### Technical Specification:

- \* Rated Power Supply : 220 ~ 240 VAC 50/60Hz
- \* Central Battery System  
CBS version available : DC 176-254V input, 220 ~ 240VAC
- \* Power Consumption : Max 3.5W
- \* Charge time : 24 Hours
- \* Discharge duration : 3 hours
- \* Battery : Ni-Cad battery / Ni-MH battery
- \* Changeover voltage : 144-187VAC
- \* Test Facility : Manual Test, AUTO test and DALI interface available
- \* Viewing distance : 30m
- \* Operation : Maintained and Non-maintained
- \* Mounting : Wall mounting and Ceiling mounting
- \* LED : SMD 2835, CCT 6000K, CRI>70
- \* Luminance or white : Normal Luminance 200cd/m<sup>2</sup>  
: High Luminance 500cd/m<sup>2</sup>
- \* Insulation class : Class II
- \* Housing material : ABS
- \* Ambient temp for normal : -5°C... +45°C
- \* Ambient temp for 500cdx  
and CBS model : 0°C... +40°C