


ESA - 12 EXIT EMERGENCY LIGHT



Standard Features:

- * Compact and decorative design
- * LED self contained luminaire with manual test and AUTO test optional
- * Ni-Cad and Ni-MH battery optional
- * Single and double face universal
- * Replaceable pictogram design including **arrow right, left and down**
- * High Luminance model optional
- * Low operation cost via low power consumption
- * Maintained and non-maintained operation changeable
- * Material of luminaire compliant with the glow wire test at temperature of 850°C
- * RoHS compliance

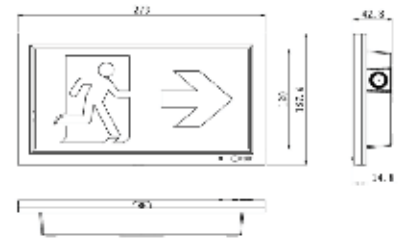

Technical Specification:

- * Rated Power Supply : 220 ~ 240 VAC 50/60Hz
- * Central Battery System
CBS version available : DC 176-254V input, 220 ~ 240VAC
- * Power Consumption : Max 3.5W
- * Charge time : 24 Hours
- * Discharge duration : 3 hours
- * Battery : Ni-Cad battery / Ni-MH battery
- * Changeover voltage : 144-187VAC
- * Test Facility : Manual Test, AUTO test and DALI interface available
- * Viewing distance : 30m
- * Operation : Maintained and Non-maintained
- * Mounting : Wall mounting and Ceiling mounting
- * LED : SMD 2835, CCT 6000K, CRI>70
- * Luminance or white : Normal Luminance 200cd/m²
High Luminance 500cd/m²
- * Insulation class : Class II
- * Housing material : ABS
- * Ambient temp for normal : -5°C... +45°C
- * Ambient temp for 500cdx
and CBS model : 0°C... +40°C