



MT-002 FIXED EMERGENCY LIGHTING


Features:

- * 6 Volt Thermoplastic battery
- * Unit damp location listed is standard on all models sealed
- * Maintenance free lead calcium battery
- * UL listed

Electrical:

- * Dual Voltage input: 120/277 VAC, 50/60Hz
- * Line - latching
- * Brownout circuit
- * Low voltage disconnection
- * Overload / short circuit protection
- * Test switch / power connector facilitates installation

Dimensions:

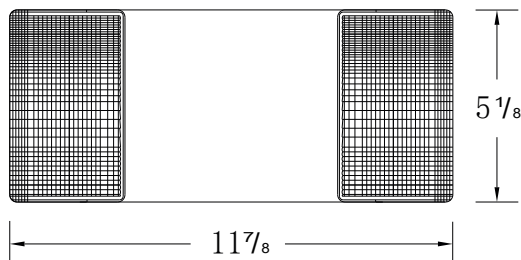

Dimensions are approximate
and subject to change.

Housing Construction:

- * All components are injection molded, color stable, high impact thermoplastic material
- * Designer textured finish standard
- * Components are of snap-fit construction to facilities under 5 minute installation
- * Reinforcing ribs throughout to provide maximum strength
- * Suitable for wall or ceiling mount applications
- * Universal J-box mounting pattern
- * Keyhole mounting slots

Battery:

- * Sealed Lead calcium, recombination maintenance - free, long life
- * Full recharge time: 24 hrs (Max)
- * Polarized battery terminals



The MT-002 series is an aesthetically attractive, economical unit ideal for commercial or institutional facilities. This unit offers reliable performance in a low profile, contemporary design.