




CR-7007GX- 220 LED EMERGENCY EXIT SIGN




Features:

- * Injection - molded Thermoplastic ABS housing
- * UL-94V-0 flame rating, fire resistant
- * Input Voltage: 120-277VAC; 50/60Hz
- * Power consumption: 3W max
- * Output: 1W max
- * 3.6V Nickel Cadmium Battery
- * Charging time: 24 hours
- * Discharge time: 3 hours
- * Working time: 180 minutes
- * Operating temperature: 0°C~40°C
- * Dimension: 299*184.5*44.6mm

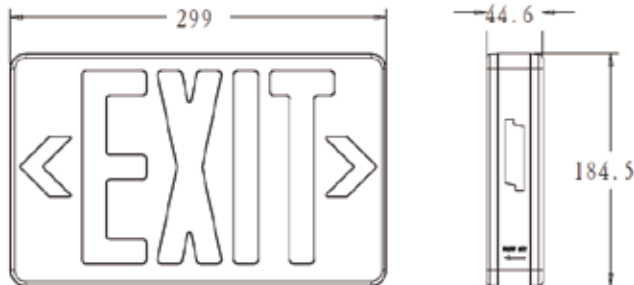

Dimensions:



Picture	Model	Voltage	Color	Discharge time	Certificate
	CR-7007RX-220	220- 240V	RED	3 hours	UL, UAE - COC
	CR-7007GX-220	220- 240V	GREEN	3 hours	UL, UAE - COC
	CR-7007				