




ShenZhen Garrini Electronics Co.,Ltd

Specification Sheet For Emergency light BK2 Series

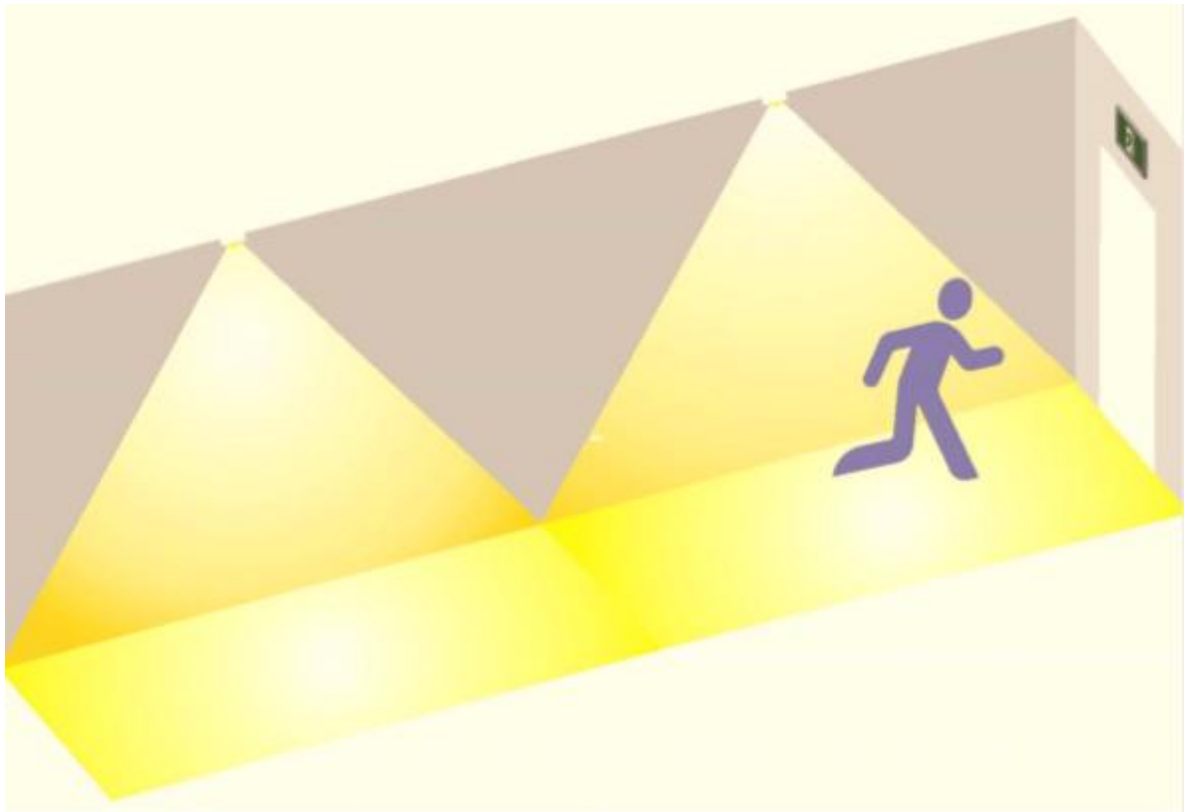

IP65

ShenZhen Garrini Electronics Co.,Ltd

Add: 2-1906, No.9013 Bin He Da Dao, Shenzhen, China

Tel: +86-755-82147232, 82143891

Fax: +86-755-82147223

<http://www.garrini.com>

Email: shelley@garrini.com



Emergency light

Model: BK2- ACEM-Z

BK2-DALI-Z

STANDARD FEATURES

HOUSING

- Size: 340x105x60mm
- PC housing.
- IP 65.
- Suitable for damp location.
- Suitable for use in 5~50°C ambient temperature.
- IK 08 protection rating.
- **Clear Lens or opal lens** is available.

MOUNTING

- Wall, Ceiling mounting, Recessed Ceiling mounting

WARRANTY

- **5 Years for fixture, 5 Years for Battery.**

ELECTRICAL FEATURES

ELECTRICAL

- 220~240V 50Hz operation.
- LED indicator light and push button test switch.
- **Non-maintained and Maintain switchable**

LAMPS

- 2 Watts max, 9pcs SMD LED
- Lumen output battery: 140 LM
- LED color temperature: 6000K-7000K

ORDER OPTION

GBK2-ACEM-Z	GBK2- DALI-Z:
<p>With battery backup</p> <ul style="list-style-type: none"> ● 3.2V 1500mAh LFP18650 (LiPO4) Battery with 5 years life time. ● More than 3 hours duration Emergency time ● Full charging time: 24 hours ● Maintained and Non-maintained both ● Over-charge and over-discharge protection 	<p>Using for monitoring system</p> <ul style="list-style-type: none"> ● With addressable smart power comply with DALI stand ● More than 3 hours duration Emergency time




ORDER OPTION:

PP Pictogram



Recessed kit

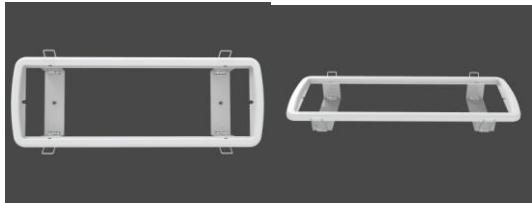

CERTIFICATE:



UL Certificate LISTED