



**SECURE**





**SECURE**


**SE007C / SE008C  
CONCEALED PENDENT SPRINKLER HEAD  
STANDARD / QUICK RESPONSE**

EX27901

**Technical Dimension:**

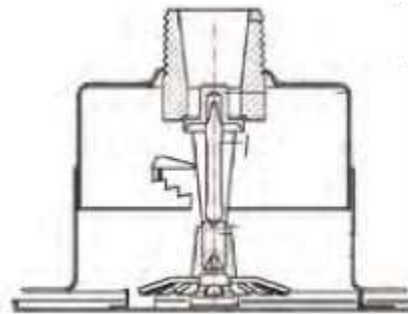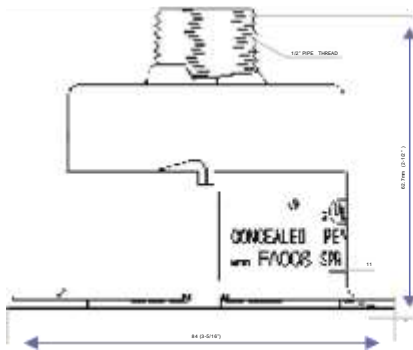

**Technical Specification:**

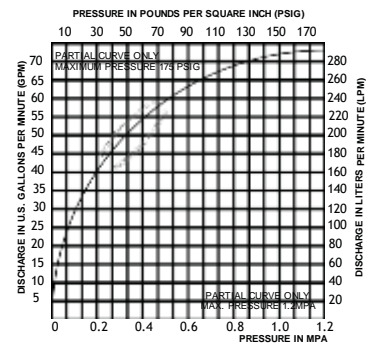

Nominal Discharge Curve

Model & Sprinkler I.D No.	SE007C		SE008C	
Style	CONCEALED PENDENT			
Response & Bulb Nominal Diameter	Standard response, B5mm		Quick response, B3mm	
Temperature Classification	Ordinary	Ordinary	Intermediate	Intermediate
Nominal Temperature Rating	135°F / 57°C	155°F / 68°C	175°F / 79°C	200°F / 93°C
Max. Ambient Temperature allowed <sup>2</sup>	115°F / 46°C	135°F / 79°C	155°F / 68°C	180°F / 82°C
Max. Recommended Ambient Temp <sup>3</sup>	100°F / 38°C	100°F / 93°C	150°F / 65°C	150°F / 65°C
Glass Bulb	Yellow	Red	Yellow	Green
Thread Size (optional)	NPT 1/2 OR R 1/2			
Nominal Orifice Size	1/2 INCH			
Nominal K-factor	5.6 (US) / 80 (METRIC)			
Maximum working pressure	175 PSIG / 1.2 Mpa (12 BAR)			
Factory Hydrostatic Test	100% @ 500 PSIG (3.4Mpa)			
Min. Operating Pressure	7 PSIG / 0.048 Mpa (0.48 BAR)			
Sprinkler Finish ( optional)	NATURAL BRASS OR CHROME PLATED			
Listing and approvals	UL			