



SECURE




SECURE


**SE005P / SE006P
PENDENT SPRINKLER HEAD
STANDARD / QUICK RESPONSE**

EX27901

Technical Dimension:

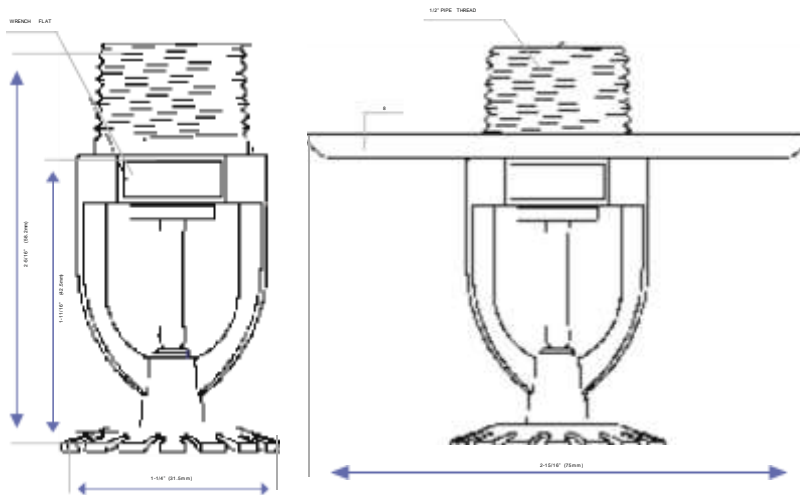

Technical Specification:

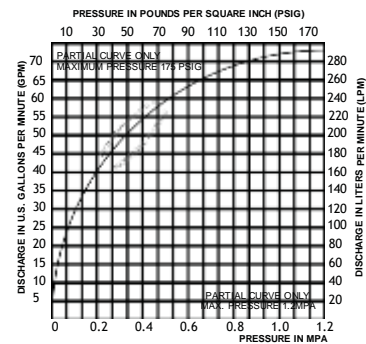

Nominal Discharge Curve

| Model & Sprinkler I.D No. | SE005P | SE006P |
|---|--------------------------------|----------------------|
| Style | PENDENT | |
| Response & Bulb Nominal Diameter | Standard response, B5mm | Quick response, B3mm |
| Temperature Classification | INTERMEDIATE | |
| Nominal Temperature Rating | 175°F / 79°C | 200°F / 93°C |
| Max. Ambient Temperature allowed ² | 155°F / 68°C | 180°F / 82°C |
| Max. Recommended Ambient Temp ³ | 150°F / 65°C | 150°F / 65°C |
| Glass Bulb | Yellow | Green |
| Thread Size (optional) | NPT 1/2 OR R 1/2 | |
| Nominal Orifice Size | 1/2 INCH | |
| Nominal K-factor | 5.6 (US) / 80 (METRIC) | |
| Maximum working pressure | 175 PSIG / 1.2 Mpa (12 BAR) | |
| Factory Hydrostatic Test | 100% @ 500 PSIG (3.4Mpa) | |
| Min. Operating Pressure | 7 PSIG / 0.048 Mpa (0.48 BAR) | |
| Sprinkler Finish (optional) | NATURAL BRASS OR CHROME PLATED | |
| Listing and approvals | UL | |