

FONUX BK3-ACEM EXIT EMERGENCY LIGHT


Brand: Fonux | Category: Exit Emergency Light

Product Datasheet	Website Know More PDF
Recommended Website Card Name	FONUX BK3-ACEM EXIT EMERGENCY LIGHT
Source Datasheet	Exit Light BK3-ACEM Hanging recessed - Fonux.pdf


EMERGENCY BULK HEAD
PRODUCT SPECIFICATION SHEET
MODEL : BK3-ACEM

INPUT VOLTAGE :
220-240VAC

OUTPUT LUMENS:
VIEW DISTANCE 30M

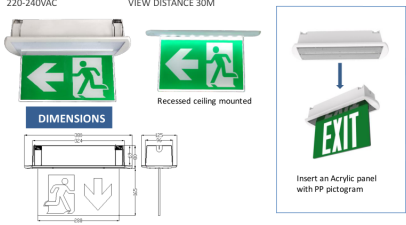

DIMENSIONS



STANDARD FEATURES


- ◆ PC Housing
- ◆ Changeable pictogram
- ◆ IP44 for lens side
- ◆ IK 06 protection rating
- ◆ Suitable for damp location.
- ◆ Suitable for use in 5-45°C ambient temperature.
- ◆ RoHS Compliant.
- ◆ Recessed ceiling mounted
- ◆ Warranty: **5 Years for fixture, 5 Years for Battery.**

RoHS COMPLIANT

ELECTRICAL FEATURES

- ◆ Input Voltage: 220-240Vac, 50Hz
- ◆ Input Power Rating: 3.5 Watts max. SMD LED
- ◆ LED color temperature: 6000K-7000K
- ◆ Output lumens 200lm @opal lens
- ◆ Maintain and Non-maintain is switchable option
- ◆ Battery: 3.2V 1500mAh 18650type
- ◆ Discharge Operation: 3 Hours
- ◆ Recharge Time : 24 Hours
- ◆ LED indicator light and push button test switch.

CERTIFICATION

UL certificate 

ORDER GUIDE

Model no.: BK3-ACEM	Model no.: BK3-DALI
<ul style="list-style-type: none"> ◆ Common Non-maintained & Maintained switchable self-contained emergency light ◆ Manual test 	<ul style="list-style-type: none"> ◆ Using for monitoring system Addressable lighting fitting. ◆ DALI options give further benefits to the user enabling the testing and monitoring of the emergency lighting system on site or via the internet. ◆ DALI interface test

Page 1

Key Details

- Recessed emergency bulkhead
- Changeable pictogram
- 3-hour discharge operation

Original manufacturer / supplier datasheet pages are included after this cover page for technical reference.

INPUT VOLTAGE :

220-240VAC


OUTPUT LUMENS:

VIEW DISTANCE 30M



Recessed ceiling mounted

DIMENSIONS

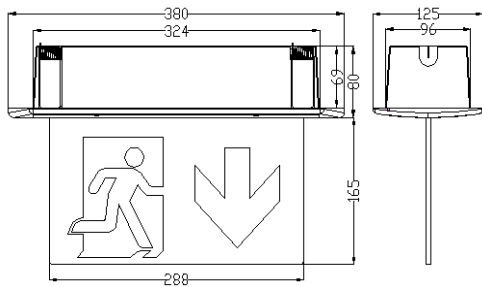

Insert an Acrylic panel with PP pictogram

STANDARD FEATURES



- ◆ PC Housing
- ◆ Changeable pictogram
- ◆ IP44 for lens side
- ◆ IK 06 protection rating
- ◆ Suitable for damp location.
- ◆ Suitable for use in 5~45°C ambient temperature.
- ◆ RoHS Compliant.
- ◆ Recessed ceiling mounted
- ◆ Warranty: **5 Years for fixture, 5 Years for Battery.**

ELECTRICAL FEATURES

- ◆ Input Voltage: 220~240Vac, 50Hz
- ◆ Input Power Rating : 3.5 Watts max, SMD LED
- ◆ LED color temperature: 6000K-7000K
- ◆ **Output lumens 200lm @opal lens**
- ◆ Maintain and Non-maintain is switchable option
- ◆ Battery : 3.2V 1500mAh 18650type
- ◆ Discharge Operation : 3 Hours
- ◆ Recharge Time : 24 Hours
- ◆ LED indicator light and push button test switch.

CERTIFICATION

UL certificate



ORDER GUIDE

Model no.: BK3-ACEM

- ◆ Common Non-maintained & Maintained switchable self-contained emergency light
- ◆ **Manual test**

Model no.: BK3-DALI

- ◆ **Using for monitoring system**
- ◆ Addressable lighting fitting.
- ◆ DALI options give further benefits to the user enabling the testing and monitoring of the emergency lighting system on site or via the internet.
- ◆ **DALI interface test**


INPUT VOLTAGE :
 220-240VAC

OUTPUT LUMENS:
 VIEW DISTANCE 30M



Recessed ceiling mounted

DIMENSIONS

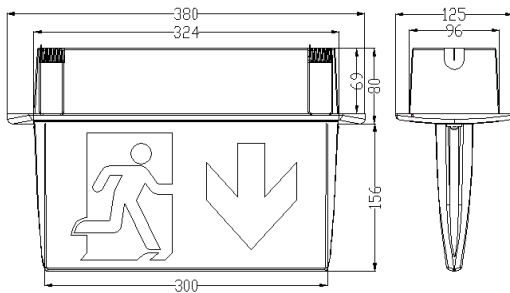

Insert an Acrylic box with PP pictogram

STANDARD FEATURES



- ◆ PC Housing
- ◆ Changeable pictogram
- ◆ IP44 for lens side
- ◆ IK 06 protection rating
- ◆ Suitable for damp location.
- ◆ Suitable for use in 5~45°C ambient temperature.
- ◆ RoHS Compliant.
- ◆ Recessed ceiling mounted
- ◆ Warranty: **5 Years for fixture, 5 Years for Battery.**

ELECTRICAL FEATURES

- ◆ Input Voltage: 220~240Vac, 50Hz
- ◆ Input Power Rating : 3.5 Watts max, SMD LED
- ◆ LED color temperature: 6000K-7000K
- ◆ **Output lumens 200lm @opal lens**
- ◆ Maintain and Non-maintain is switchable option
- ◆ Battery : 3.2V 1500mAh 18650type
- ◆ Discharge Operation : 3 Hours
- ◆ Recharge Time : 24 Hours
- ◆ LED indicator light and push button test switch.

CERTIFICATION

UL certificate



ORDER GUIDE

Model no.: BK3-ACEM

- ◆ Common Non-maintained & Maintained switchable self-contained emergency light
- ◆ **Manual test**

Model no.: BK3-DALI

- ◆ **Using for monitoring system**
- ◆ Addressable lighting fitting.
- ◆ DALI options give further benefits to the user enabling the testing and monitoring of the emergency lighting system on site or via the internet.
- ◆ **DALI interface test**