


SECURE SE-7007GX LED EMERGENCY EXIT SIGN

Brand: **Secure** | Category: **Exit Emergency Light**


Product Datasheet	Website Know More PDF
Recommended Website Card Name	SECURE SE-7007GX LED EMERGENCY EXIT SIGN
Source Datasheet	Exit Light SE-7007GX-220 .pdf




SE-7007GX- 220
LED EMERGENCY EXIT SIGN



Features:

- * Injection - molded Thermoplastic ABS housing
- * UL-94V-0 flame rating, fire resistant
- * Input Voltage: 120-277VAC
- * Power consumption: 3W max
- * Output: 1W max
- * 3.6V Nickel Cadmium Battery
- * Charging time: 24 hours
- * Discharge time: 3 hours
- * Working time: 180 minutes
- * Operating temperature: 0°C~40°C
- * Dimension: 299*184.5*44.6mm



Dimensions:



Picture	Model	Voltage	Color	Discharge time	Certificate
	SE-7007RX-220	220-240V	RED	3 hours	UL, UAE - COC
	SE-7007GX-220	220-240V	GREEN	3 hours	UL, UAE - COC

Al Rayan Industrial Area 4, Dubai, United Arab Emirates. Tel: 04-2630390-042525333. rayan@alrayan.com
www.alrayan.com

Key Details

- LED emergency exit sign
- Green exit legend
- 3-hour discharge time

Original manufacturer / supplier datasheet pages are included after this cover page for technical reference.



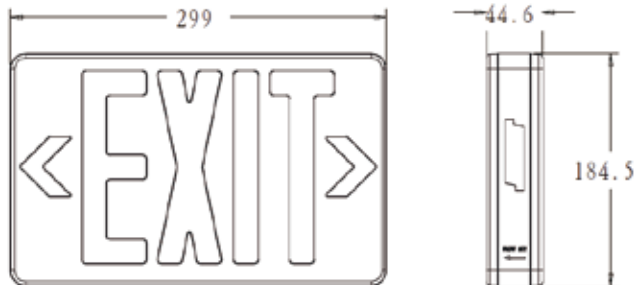
SE-7007GX- 220 LED EMERGENCY EXIT SIGN





Features:

- * Injection - molded Thermoplastic ABS housing
- * UL-94V-0 flame rating, fire resistant
- * Input Voltage: 120-277VAC
- * Power consumption: 3W max
- * Output: 1W max
- * 3.6V Nickel Cadmium Battery
- * Charging time: 24 hours
- * Discharge time: 3 hours
- * Working time: 180 minutes
- * Operating temperature: 0°C~40°C
- * Dimension: 299*184.5*44.6mm

Dimensions:



Picture	Model	Voltage	Color	Discharge time	Certificate
	SE-7007RX-220	220- 240V	RED	3 hours	UL, UAE - COC
	SE-7007GX-220	220- 240V	GREEN	3 hours	UL, UAE - COC